TECHNICAL SHEET

SINGLE LEFT CHECK VALVE BRASS 4MS BSP EPDM PS10 DN 2"1/2 TO 4"

References)
32SL0F4
32SL0F1



1. Standards


- ✓ ISO 9001:2015 certified manufacturer
- ✓ DIRECTIVE 2014/68/EU: Products excluded from the directive (Article 1, § 2b)
- ✓ BSP female cylindrical thread according to ISO 228-1

2. Features

Use :	Water supply, distribution and evacuation networks
Dimensions:	2"1/2 to 4"
Connection :	Female BSP
Minimum temperature:	+0°C
Max temperature:	+60°C
Max Pressure:	10 Bars
Features :	Single leaf Vertical or horizontal mounting EPDM seat (NBR from DN2"1/2)
Materials :	Brass body CW617N-4MS according to EN12165


Information given for information purposes only and subject to possible modifications

3. Materials

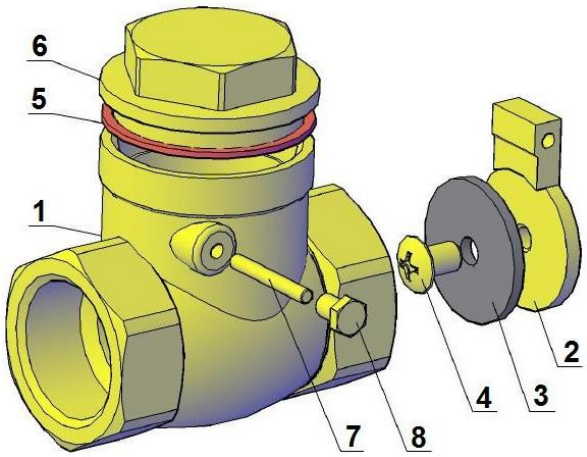

Landmark	Designation	Materials DN 3/8" to 2"	Materials DN 2"1/2 to 4"
1	Body	Brass CW617N-4MS according to EN 12165	
2	Flying		
3	Seal	EPDM	NBR
4	Screw	Brass Hpb59-1	Brass CW614 N according to EN 12164
5	Hat seal	Fibers	NBR
6	Hat	Brass CW617N-4MS according to EN 12165	
7	Axis	Brass Hpb59-1	
8	Axle screw		

4. Dimensions (mm)

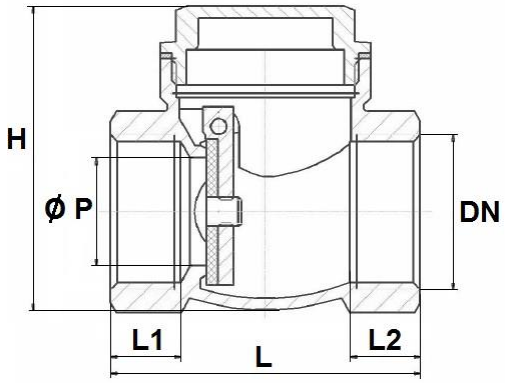

DN	2"1/2	3"	4"
ØP	55	68	88
L	116	135	164
L1	16	16	20
L2	16	16	20
H	113	133	166
Weight (in Kg)	1.58	2.25	3.84

Information given for information purposes only and subject to possible modifications