PRESSURE GAUGE AXIAL STAINLESS STEEL CASE WITH GLYCERINE ∅100 BSP

Reference(s) 50GA1*



Range (bar)	Graduation (bar)	Ref.
-1 / +1	0,05	50GA1A
0 / 1,6	0,02	50GA1D
0 / 2,5	0,05	50GA1E
0 / 4	0,1	50GA1F
0 / 6	0,1	50GA1G
0 / 10	0,2	50GA1H
0 / 16	0,2	50GA1I

1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Features


Use :	Not for viscous or crystallizing liquid
Size :	Ø100
Connection :	Male 1/2" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Pressure range :	-1/+1 Bar to 0+/600 Bars
Specifications :	Stainless steel box Bourdon brass tube Wet dial with glycerine Class 1
Materials :	AISI 304 box

Information provided as an indication and subject to possible modification

3. Materials

DESIGNATION	MATERIALS
Case	AISI 304
Fitting	Brass
Mechanism	
Dial	Duralumin
Glass	Plexiglass
Needle	Duralumin

4. Size (in mm)

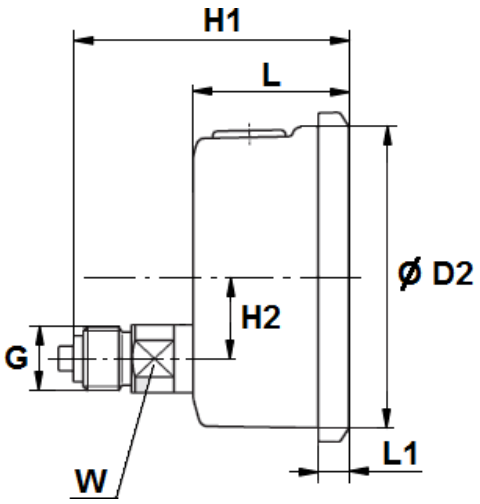

DN	
L	43
H1	88
Ø D1	100
Ø D2	14,5
L1	1/2
G	27
W	22
Weight (kg)	0,71

Information provided as an indication and subject to possible modification